




ADJUSTABLE TWO-POINT PULL HANDLE


Wide Range of Mounting Dimensions





FEATURES

- Ability to adjust the handle's center to center mounting hole locations provides mating to a variety of fixed mounting hole dimensions.
- Universal end caps are made out on 33% Glass Filled Nylon for exceptional load capabilities. Reinforced delrin rod is also available in different lengths.
- Robust and ergonomic design adapts to a wide array of products in many applications.
- Preassembled rod and set screws underneath the mounting ends for quick fastening of handle to desired dimension.
- ► Top mount holes on handle ends for 1/4-20 and M6 threaded cap screws.
- View full product offerings at www.daviesmolding.com

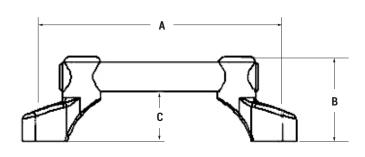

Part No.	Max Center to Center (A)	Total Height (B)	Handle Height (C)	Rod Length
4605BB	6.19"/157mm	2.13"/54mm	1.25"/32mm	5"/127mm
4608BB	9.19"/233mm	2.13"/54mm	1.25"/32mm	8"/203mm



