

Rohde

FG

Handle series FG4-P

Handles with switching function for pneumatic purposes.

Material and surface:

Handle shanks of polyamide PA 6, glass ball reinforced, black, similar to RAL 9005, half-matt with fine structure. Connecting ledge of profiled aluminium AlMgSi 0.5; natural coloured anodized.

Version:

Manually operated push button with 3/2 or 5/2 solenoid valve with return spring for filtered or oiled compressed air.

Compressed air connection:

Straight or angled adaptor, ø 4 mm with o-ring.


Note:

Other handle lengths on request. Handle versions without functions see page 33.





2006

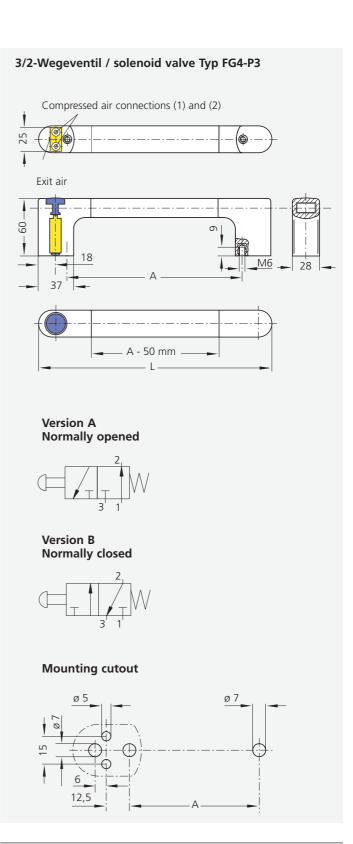

Handles with 3/2-solenoid valve

	Version A	Version B
A* L	Order no.	Order no.
300 360	FG4-P3.A300.11	FG4-P3.B300.11

^{*}Other handle lengths on request



Rohde


FG


5/2-Solenoid valve

Typ FG4-P5.W with angled adaptor


Typ FG4-P5.G with straight adaptor


Compressed air connections (2) and (4)







Exit air






Compressed air connection (1) right







Compressed air connection (1) left

5/2-Solenoid valve







Handles with 5/2-solenoid valve

A*	L		Order no.
300	360	with angled adaptor left	FG4-P5.WL300.11
		with straight adaptor left	FG4-P5.GL300.11
		with angled adaptor right	FG4-P5.WR300.11
		with straight adaptor right	FG4-P5.GR300.11

^{*}Other handle lengths on request



Typ FG4-P5.WL



Typ FG4-P5.GL

